



Micro Detectors

Italian Sensors Technology




Application book
Material Handling:
forklifts

Inductive Sensors

Proximity Sensor
Catalogue

Cod. CAT3E001261659

Application book - Inductive Sensors - English - Ed.01/2012

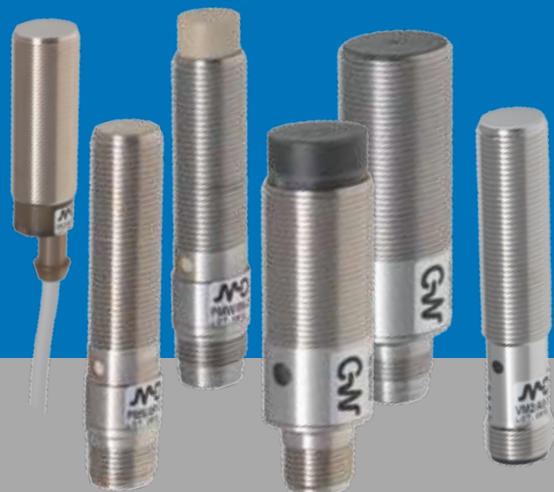



application book

inductive
cylindrical

Series Miniaturized, Standard, DECOUT[®], IP68, Cubic

inductive cylindrical



www.microdetectors.com



applications

- detection of presence of the operator on the seat
- detection of the limit positions of the forks
- detection of the speed of the forklift and of the working time
- detection of operator holding the tiller
- detection of clamps opening
- detection of the presence of the operator on the platform



features

7 different special models designed to meet different Customer requirements

Supply voltage up to 10...50 Vdc to be used with battery supplied vehicles

Special cables suitable to be used at low temperature (down to -40° C for cold storages)

Different mechanical housings to fit with the Customer needs

Special logic output: NPN+PNP / NO-NC selectable


High volume manufacturing capability

approvals



protection degree

IP67, IP68

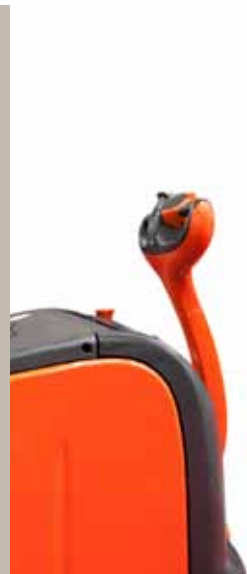



application book

inductive
cylindrical

Miniaturized

PA

PB

PC

PD

PP

PH

PE

Standard

AH

AE

AM

AK

AT

DECOUT®

PM3

PK3

IP68

PMS

PMW

PKS

PKW

Cubic

IL

detection of presence of operator on seat

Only when the operator is in the right position, the forklift is allowed to move. This function is required to make safe the working operations.

applied solution

When the operator is seated, the seat is pushed down. The inductive sensor detects the position of the seat and enable the internal logic to work.



detection of the limit positions of the forks

Before starting to move at full speed, the load have to be in a safe position.

applied solution

Two inductive sensors detect the minimum and maximum height of the forks from the ground



Miniaturized

PA

PB

PC

PD

PP

PH

PE

Standard

AH

AE

AM

AK

AT

DECOUT®

PM3

PK3

IP68

PMS

PMW

PKS

PKW

Cubic

IL



application book

inductive
cylindrical

Miniaturized

PA

PB

PC

PD

PP

PH

PE

Standard

AH

AE

AM

AK

AT

DECOUT®

PM3

PK3

IP68

PMS

PMW

PKS

PKW

Cubic

IL

detection of the speed of the forklift and of the working time

Forklifts generally don't have a speedometer or an odometer.

applied solution

With an inductive sensor on the driving wheels it is possible to measure the speed of the vehicle by a fonic wheel. The control system detects also the working time to program the maintenance services.



detection of the operator holding the tiller

Only when the operator is holding the tiller, the forklift is allowed to move.

applied solution

An inductive sensor detects if the tiller is vertical (stop position) or not. Only in the second case the forklift is enabled to move.



Miniaturized

PA

PB

PC

PD

PP

PH

PE

Standard

AH

AE

AM

AK

AT

DECOUT®

PM3

PK3

IP68

PMS

PMW

PKS

PKW

Cubic

IL



application book

inductive
cylindrical

Miniaturized

PA

PB

PC

PD

PP

PH

PE

Standard

AH

AE

AM

AK

AT

DECOUT®

PM3

PK3

IP68

PMS

PMW

PKS

PKW

Cubic

IL

detection of the clamps opening

In container logistic it is necessary to operate only in safe conditions

applied solution

Inductive sensors detect if the clamps are opened or closed.



detection of presence of the operator on the platform

Only when the operator is in the right position, the forklift is allowed to move. This function is required to make safe the working operations.

applied solution

When the operator is present, the platform is pushed down. The inductive sensor detects the position of the platform and enable the internal logic to work.



Miniaturized

PA

PB

PC

PD

PP

PH

PE

Standard

AH

AE

AM

AK

AT

DECOUT®

PM3

PK3

IP68

PMS

PMW

PKS

PKW

Cubic

IL







application book




inductive
cylindrical

Inductive Sensors

Miniaturized

		PA	PB	PC	PD
					
dimensions		ø 3 mm	M4	ø 4 mm	M5
standard shielded		0.6 mm	0.6 mm	0.8 mm	0.8 mm
standard unshielded		—	—	—	—
long distance shielded		1 mm	1 mm	1.5 mm	1.5 mm
long distance unshielded		—	—	—	—
standard housing		—	—	—	—
short housing		—	—	—	—
miniaturized housing		•	•	•	•
power supply	Vdc	•	•	•	•
	Vac	—	—	—	—
output type	NPN - NO	•	•	•	•
	NPN - NC	•	•	•	•
	PNP - NO	•	•	•	•
	PNP - NC	•	•	•	•
	PNP - NO - NC	—	—	—	—
	NPN - NO + NC	—	—	—	—
	DECOUT®	—	—	—	—
	SCR	—	—	—	—
0...10 V		—	—	—	—
4...20 mA		—	—	—	—
temperature range		-25°C...+70°C	-25°C...+70°C	-25°C...+70°C	-25°C...+70°C
protection degree		IP67	IP67	IP67	IP67
housing material		stainless steel	stainless steel	stainless steel	stainless steel
active head material		PBT	PBT	PBT	PBT
output	cable	•	•	•	•
	M8 plug	—	—	•	•
	M12 plug	—	—	—	—
ATEX		—	—	—	—
other certifications		CE	CE	CE	CE



PP	PH	PE
		
5x5x25 mm	ø 6.5 mm	M8
0.8 mm	1.5 mm	1.5 mm
—	—	—
1.5 mm	—	—
—	—	—
—	—	—
•	•	•
•	•	•
—	—	—
•	•	•
•	•	•
•	•	•
•	•	•
—	—	—
—	—	—
—	—	—
—	—	—
—	—	—
-25°C...+70°C	-25°C...+70°C	-25°C...+70°C
IP67	IP67	IP67
stainless steel	stainless steel	stainless steel
PBT	PBT	PBT
•	•	•
•	•	•
—	—	—
—	—	—
CE	CE	CE










application book

inductive
cylindrical







Inductive Sensors

Standard

		AH	AE	AM	AK
					
dimensions		ø 6.5 mm	M8	M12	M18
standard shielded		1.5 mm	1.5 mm	2 mm	5 mm
standard unshielded		2.5 mm	2.5 mm	4 mm	8 mm
long distance shielded		2 mm	2 mm	4 mm	8 mm
long distance unshielded		4 mm	4 mm	8 mm	12 mm
standard housing		•	•	•	•
short housing		•	•	•	—
miniaturized housing		—	—	—	—
power supply	Vdc	•	•	•	•
	Vac	—	—	—	—
output type	NPN - NO	•	•	•	•
	NPN - NC	•	•	•	•
	PNP - NO	•	•	•	•
	PNP - NC	•	•	•	•
	PNP - NO / NC	—	—	—	—
	NPN - NO + NC	—	—	—	—
	DECOUT®	—	—	—	—
	SCR	—	—	—	—
0...10 V		—	—	—	—
4...20 mA		—	—	—	—
temperature range		-25°C...+70°C	-25°C...+70°C	-25°C...+70°C	-25°C...+70°C
protection degree		IP67	IP67	IP67	IP67
housing material		stainless steel	nickel plated brass	nickel plated brass	nickel plated brass
active head material		PBT	PBT	PBT	PBT
output	cable	•	•	•	•
	M8 plug	•	•	•	—
	M12 plug	•	•	•	•
ATEX		II3GD	II3GD	II3GD	II3GD
other certifications					







DECOUT® NPN/PNP - NO/NC

AT	PM3	PK3
		
M30	M12	M18
10 mm	2 mm	5 mm
15 mm	4 mm	8 mm
15 mm	—	—
20 mm	—	—
•	•	•
—	—	—
—	—	—
•	•	•
—	—	—
•	•	•
•	•	•
•	•	•
•	•	•
•	•	•
—	•	—
—	•	—
—	•	•
—	—	—
—	—	—
—25°C...+70°C	—25°C...+70°C	—25°C...+70°C
IP67	IP67	IP67
nickel plated brass	nickel plated brass	nickel plated brass
PBT	PBT	PBT
•	•	•
—	•	—
•	•	•
II3GD	II3GD	II3GD
		



Inductive Sensors

IP68

		PMS	PMW	PKS	PKW
					
dimensions		M12	M12	M18	M18
standard shielded		2 mm	2 mm	5 mm	5 mm
standard unshielded		4 mm	4 mm	8 mm	8 mm
long distance shielded		—	—	—	—
long distance unshielded		—	—	—	—
standard housing		●	●	●	●
short housing		—	—	—	—
miniaturized housing		—	—	—	—
power supply	Vdc	●	●	●	●
	Vac	—	—	—	—
output type	NPN - NO	—	—	—	—
	NPN - NC	—	—	—	—
	PNP - NO	—	—	—	—
	PNP - NC	—	—	—	—
	PNP - NO - NC	●	—	●	●
	NPN - NO + NC	●	—	●	●
	DECOUT®	—	—	—	—
	SCR	—	—	—	—
0...10 V		—	—	—	—
4...20 mA		—	—	—	—
temperature range		-25°C...+70°C	-25°C...+70°C	-25°C...+70°C	-25°C...+70°C
protection degree		IP67/IP68	IP67/IP68	IP67/IP68	IP67/IP68
housing material		nickel plated brass	stainless steel	nickel plated brass	stainless steel
active head material		PPS	PPS	PSU	PSU
output	cable	—	—	—	—
	M8 plug	—	—	—	—
	M12 plug	●	●	●	●
ATEX		II3GD	II3GD	II3GD	II3GD
other certifications		CE	CE	CE	CE



Cubic

IL



dimensions	10x16x28 mm	
standard shielded	—	
standard unshielded	—	
long distance shielded	3 mm	
long distance unshielded	6 mm	
standard housing	●	
short housing	—	
miniaturized housing	—	
power supply	Vdc	●
	Vac	—
output type	NPN - NO	●
	NPN - NC	●
	PNP - NO	●
	PNP - NC	●
	PNP - NO - NC	—
	NPN - NO + NC	—
	DECOUT®	—
	SCR	—
	0...10 V	—
4...20 mA	—	
temperature range	-25°C...+70°C	
protection degree	IP67	
housing material	PA	
active head material	PA	
output	cable	●
	M8 plug	●
	M12 plug	—
ATEX	—	
other certifications	CE	



Proximity Sensors
Catalogue



CAT3E001261659 DATASHEET INDUCTIVE SENSORS ENGLISH ED.01/2012

All information written in this catalogue are subject to modifications without notice.
They don't represent any obligation for M.D. Micro Detectors

Any variation will be implemented in this catalogue and its electronic version, available on the corresponding page of M.D. Micro Detectors website:
www.microdetectors.com