

# DS6400 High Performance Laser Scanner



## General Description

The new **DS6400** has been specifically designed to satisfy the needs of various AutoID applications in Manufacturing and Logistics applications.

The **DS6400** is based on the same concept of the DS6300 and DS6500: a complete and modular solution in terms of reading performance, connectivity, ease of use and maintenance.

Modularity and flexibility of the **DS6400** is based on an innovative mechanical design with the scanner separated in two parts: the reading head and decoder base. As a result, it is possible to always install the scanner in the ideal position, by simply rotating the Head / Base position ("Step-A-Head").

The **DS6400** has a built-in linear motor providing a dynamic focus system called FLASH™, fully controlled via SW, which covers an impressive reading range of over 2 meters. FLASH™ is capable of moving the focus position from the minimum to the maximum position, in less than 10 msec. FLASH™ complements ASTRA™ technology, based on a multi-laser architecture, which maximizes the real time depth of field. The **DS6400** is offered both in linear and integrated Oscillating Mirror (OM) versions, which are fully SW controlled.

The **DS6400** has the same decoder base as the DS6300, with built-in connectivity to Ethernet, Devicenet and Profibus.

With the GENIUS™ program, it's easy to setup the scanner and to perform functions such as remote control and SW updates on any slave scanner of the cluster by simply connecting the Master.

## Features

- > New "FLASH™" dynamic focus system
- > Totally SW controlled
- > Reading range from 300 to 2500 mm
- > Strong Arm decoder with code reconstruction capability (ACR3)
- > Linear and integrated Oscillating Mirror versions
- > Display and keyboard
- > GENIUS™ SW configurator
- > Built-in connectivity to Ethernet / Devicenet / Profibus
- > PackTrack™ function

## Applications

- > Shop Floor, WIP tracking in Manufacturing, Automotive, Electronics, Consumer Products
- > Reading on pallets in Warehousing and Distribution
- > Tracking and sorting of goods

### Specifications

#### ELECTRICAL CHARACTERISTICS

POWER SUPPLY 15 to 30 Vdc  
 POWER CONSUMPTION 15 W max.

#### MECHANICAL CHARACTERISTICS

DIMENSIONS 113 x 110 x 99 mm (4.45 x 4.33 x 3.90 in.);  
 Integrated OM version: 180 x 113 x 99 mm (7.09 x 4.45 x 3.90 in.)  
 Linear version: 1.4 kg. (3 lb); Integrated OM version: 2 kg. (4 lb 8 oz)  
 CASE MATERIAL Aluminium

#### WEIGHT

#### CASE MATERIAL


#### PERFORMANCE

LIGHT SOURCE Visible Laser Diode (650 nm)  
 MAX. RESOLUTION 0.2 mm (8 mils)  
 SCAN RATE 600 to 1,200 scan/s (SW adjustable)  
 MAX. READING DISTANCE See diagrams  
 MAX. DEPTH OF FIELD See diagrams  
 MAX. READING FIELD See diagrams  
 READABLE CODES All the most used symbologies  
 MULTILABEL READING Up to 10 different codes in the same reading phase  
 MAIN INTERFACE RS232 / RS485 (20 mA C.L. optional)  
 AUXILIARY INTERFACE RS232 / RS485 (20 mA C.L. optional)  
 OTHER AVAILABLE INTERFACES Lonworks (Master/Slave), Ethernet, Devicenet, Profibus  
 BAUD RATE 1,200 to 115,200 bauds  
 INPUT SIGNAL 'Presence sensor' plus 3 auxiliary digital inputs  
 OUTPUT SIGNALS 3 SW programmable digital outputs  
 OPERATING MODES 'On line', 'Serial On line', 'Continuous', 'Test', 'PackTrack'  
 LED INDICATORS 'Ready', 'Reading phase active', 'Label present', 'Data transmit'  
 DISPLAY 2 lines by 16 characters LCD  
 KEYPAD 3 keys  
 LED INDICATORS 'Power ON', 'Phase ON', 'TX data'  
 LASER CLASSIFICATION IEC 825 Class 2  
 LASER CONTROL Security system to turn laser OFF in case of motor slow down


#### ENVIRONMENT

OPERATING TEMPERATURE 0 to 40 °C (32 to 104 °F),  
 STORAGE TEMPERATURE -20 to 70 °C (-4 to 158 °F)  
 PROTECTION CLASS IP64 for standard models; IP65 on request


### Reading Diagrams

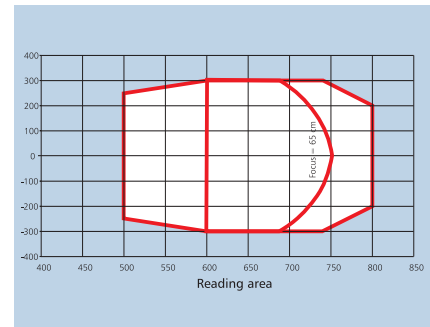

0.2 mm (8 mils) resolution codes

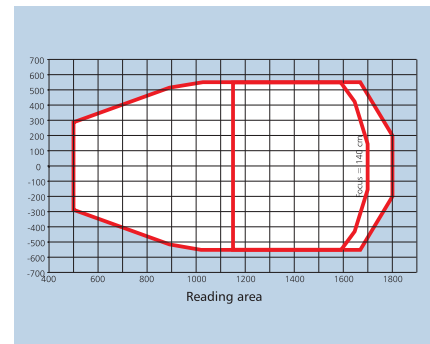


0.375 mm (15 mils) resolution codes

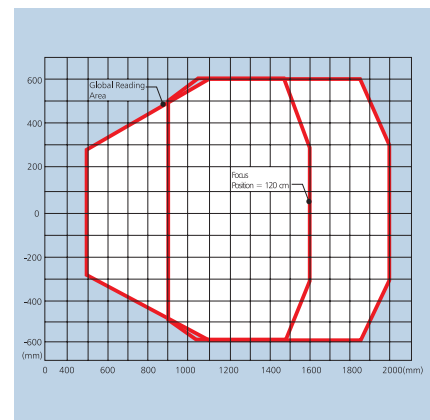

0.5 mm (20 mils) resolution codes

### Modular Concept

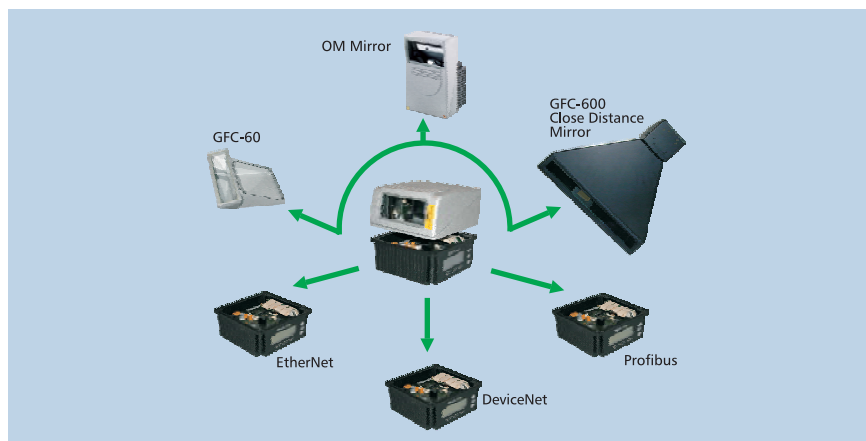

Product and Company names and logos referenced may be either trademarks or registered trademarks of their respective companies. We reserve the right to make modifications and improvements.

