

QL SERIES

Quick Link (QL & QLM) connectivity accessories provides an easy, fast, modular and cost-effective solution whenever "plug-in connection" is preferable.

QL Series is compatible with DS2100N, DS2400N, DS4800, Matrix 210™, Matrix 410™ and Matrix 450™.

QL300/500 and QLM500/600/700 link 1D/2D code readers to the Power Supply, External Trigger, IDNET™ network, Digital I/O and Communication connections including interface to Serial, Ethernet, Ethernet/IP, Profibus and Profinet.

QL100/150/200 provides an ID-NET™ "T" connector. This is the most effective way to build the ID-NET™ network by passing through power and network's signals. Service port connection (QL150) and tap power connection (QL200) are optionally available.



IDENTIFICATION

HIGHLIGHTS

- Plug-In connection
- QL500: Serial-to-Ethernet TCP/IP, Ethernet IP, Modbus conversion with RJ45 connector
- QLM500: IP65, rugged metal, all M12 connectors, double Ethernet port (avoid external switches), Ethernet TCP/IP, Ethernet IP protocol
- QLM600: IP65, rugged metal, all M12 connectors, PROFIBUS double port
- QLM700: IP65, rugged metal, all M12 connectors, double PROFINET port (avoiding external switches)
- Back-up and Restore function (QLM500/600/700 and QL500)
- Quick set-up of ID-NET™ networks with different layouts in modular way, reducing installation time and cost (by cables and T-connectors)

APPLICATIONS

- **Automated warehousing**
 - Conveyor sorting
 - Picking systems
- **Automated shop floor and General Manufacturing**
 - Items and parts tracking
 - Process control and Packaging



MODELS AND ACCESSORIES

| MODELS | | QUICK LINK CONNECTION MODULES |
|-----------|--|--------------------------------------|
| Order No. | | Description |
| 93ACC1860 | | QL100 ID-NET T-CONNECTION |
| 93ACC1868 | | QL150 ID-NET + SERVICE T-CONNECTION |
| 93ACC1861 | | QL200 ID-NET + POWER T-CONNECTION |
| 93ACC1862 | | QL300 STANDARD CONNECTION MODULE |
| 93ACC1864 | | QL500 CONNECTION MODULE + ETHERNET |
| 93ACC0033 | | QLM600 PROFIBUS IP65 CONN. MODULE |
| 93ACC0037 | | QLM500 ETHERNET/IP IP65 CONN. MODULE |
| 93ACC0038 | | QLM700 PROFINET IP65 CONN. MODULE |

| MODELS | | ID-NET AND T-CONNECTOR |
|-----------|--|-------------------------------------|
| Order No. | | Description |
| 93ACC1860 | | QL100 ID-NET T-CONNECTION |
| 93ACC1868 | | QL150 ID-NET + SERVICE T-CONNECTION |
| 93ACC1861 | | QL200 ID-NET + POWER T-CONNECTION |

| ACCESSORIES | | QUICK LINK ACCESSORIES |
|----------------|--|---|
| Service Cables | | |
| Order No. | | Description |
| 93A051385 | | CAB-AUX03 M12 3P TO DB9 SERIAL CABLE 3M (for QL150) |
| 93A051381 | | CAB-PW-EXT M12 POWER EXTENSION CABLE |
| 93ACC1883 | | FMC300 M12 3P M. CONN. SERVICE (for QL150) |
| 93ACC1884 | | FMC400 M12 3P F. CONN. POWER |
| 93A051386 | | CAB-AUX04 15P DSUB TO DB9 SERIAL CABLE |
| 970101063 | | CBL-1487 CONNECTOR THIN M12/5P/FEMALE |
| 93ACC0040 | | FMC600 M12 8P M. A-Code QLM-I/O |
| ID-NET cables | | |
| Order No. | | Description |
| 970101021 | | CBL-1480-01 THIN M12/5P MALE/FEMALE 1M |
| 970101022 | | CBL-1480-02 THIN M12/5P MALE/FEMALE 2M |
| 970101069 | | CBL-1490 TERM. RESIST. THIN M12/5P/MALE |
| 970101082 | | CBL-1496 TERM. RESIST. THIN M12/5P/FEM. |

QL SERIES TECHNICAL FEATURES

QL100, QL150, QL200


ELECTRICAL FEATURES

Power Supply 10 to 30 VDC
Limited QL + Reader Current consumption 4 A Max.

ENVIRONMENTAL FEATURES

Protection Class IP65*
Operating Temperature 0° to 50 °C (+32° to 122 °F)
Storage Temperature -20° to 70 °C (-4° to 158 °F)
Humidity Max. 90% non condensing

*When IP protection caps or IP cables and reading device are correctly connected.

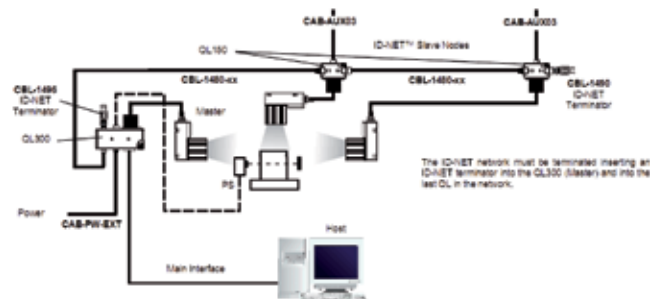

ID-NET™ Synchronized Network - QL300 + Matrix 410™ Master with QL 150 + Matrix 410™ Slaves

QL300, QL500, QLM500, QLM600, QLM700

ELECTRICAL FEATURES

Power Supply 10 to 30 VDC
Limited QL + Reader Current consumption 4 A Max.

ENVIRONMENTAL FEATURES

Protection Class IP65*
Operating Temperature 0° to 50 °C (+32° to 122 °F)
Storage Temperature -20° to 70 °C (-4° to 158 °F)
Humidity Max. 90% non condensing

PHYSICAL FEATURES

QL300/500

Mechanical Dimensions 129 x 76 x 27 mm (5.1 x 3 x 1.1 in.)
Weight QL300=312 g. (11 oz.); QL500=309 (10.9 oz.)

QLM500/600/700

Mechanical Dimensions 200 x 81 x 40 mm (7.9 x 3.2 x 1.6 in.)
Weight QLM=500 g. (18 oz.)

*When IP protection caps or IP cables and reading device are correctly connected.



The company endeavours to continuously improve and renew its products; for this reason the technical data and contents of this catalogue may undergo variations without prior notice. For correct installation and use, the company can guarantee only the data indicated in the instruction manual supplied with the products.

Rev. 00, 05/2012